

**PowerCool Series Thermoelectric Cooler Assembly**


The AA-200-24-22 is an Air-to-Air Thermoelectric Cooler Assembly that uses impingement flow to transfer heat. It offers dependable, compact performance by cooling objects via convection. Heat is absorbed and dissipated through high density heat exchangers equipped with air ducted shrouds and brand name fans. The heat pumping action is created by thermoelectric modules, which are custom designed to achieve a high coefficient of performance (COP). It has a maximum  $Q_c$  of 195 Watts when  $\Delta T = 0$  and a maximum  $\Delta T$  of 45 °C at  $Q_c = 0$ .

**Features**

- Compact design
- Precise temperature control
- Reliable solid-state operation
- Low noise
- RoHS-compliant


**Applications**

- Medical Diagnostic and Analytical Instrumentation
- Thermoelectric Coolers and Assemblies for Medical Applications
- Liquid Cooling Options for PET and SPECT Scanners
- Cooling for Centrifuges
- High-Performance Liquid Chromatography (HPLC)
- Heating and Cooling for Liquid Chromatography Systems

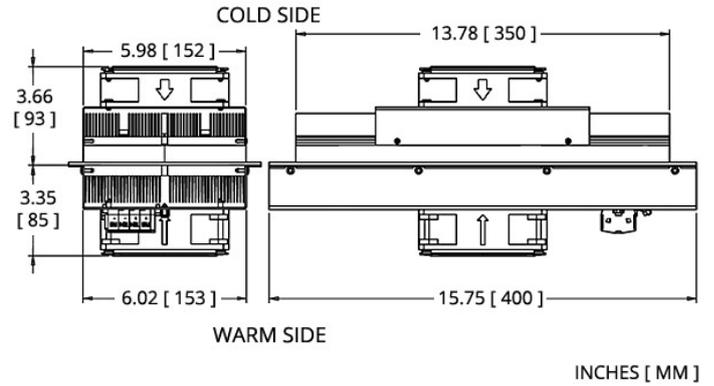


**Electrical and Thermal Performance**


Heat Pumped at Cold Side ( $Q_c$ )  
Tambient = 35°C

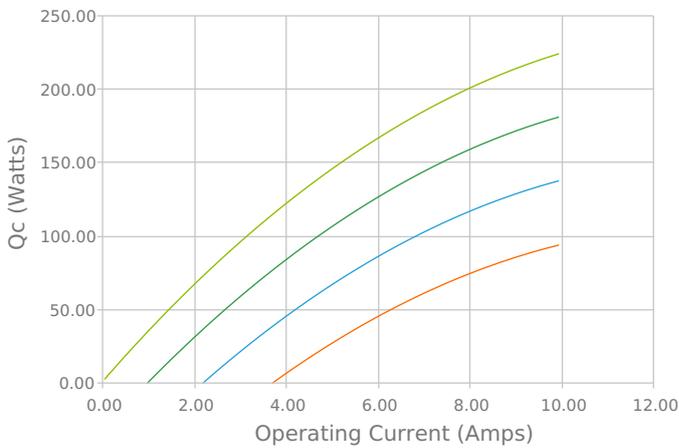


Heat Pumped at Cold Side ( $Q_c$ )  
Tambient = 35°C

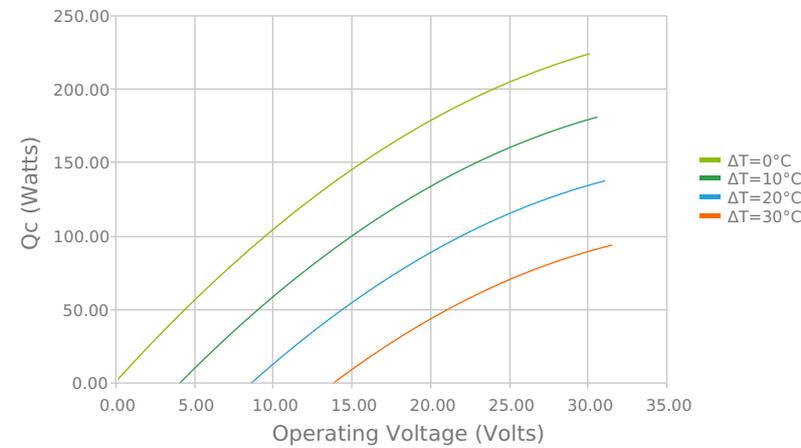


Coefficient of Performance (COP =  $Q_c/P_{in}$ )  
Tambient = 35°C

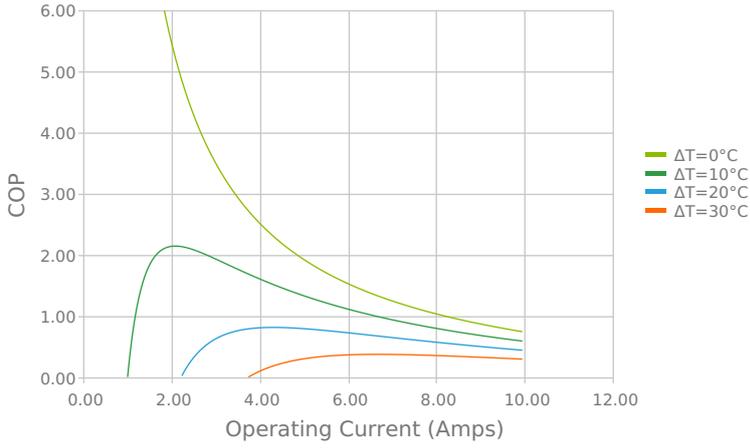


Coefficient of Performance (COP =  $Q_c/P_{in}$ )  
Tambient = 35°C

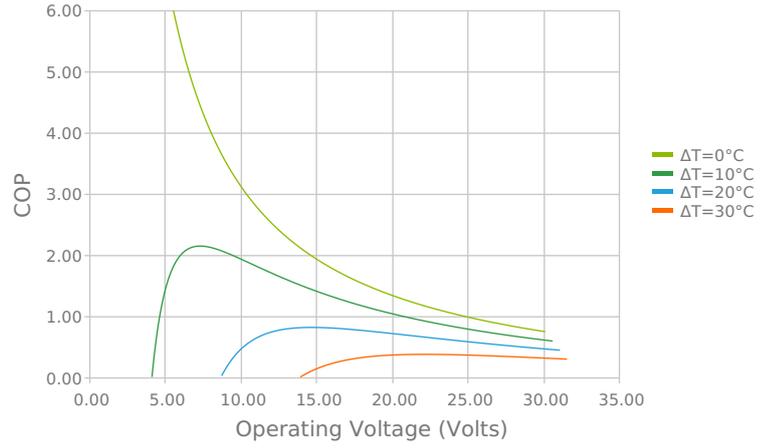


Total Heat Dissipated at Hot Side ( $Q_h=Q_c+P_{in}$ )  
Tambient = 35°C

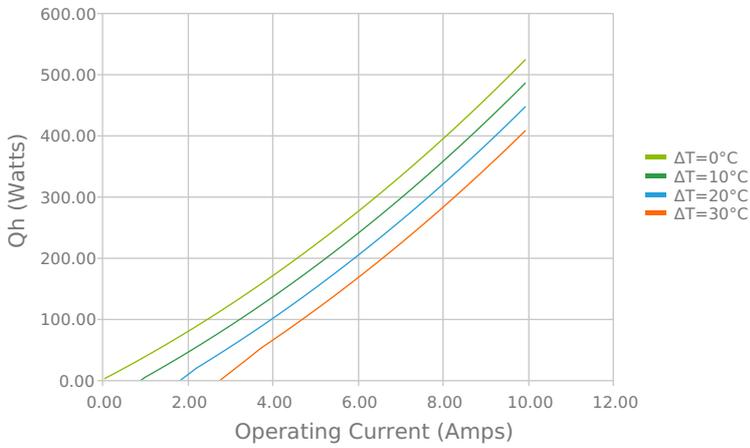


Total Heat Dissipated at Hot Side ( $Q_h=Q_c+P_{in}$ )  
Tambient = 35°C

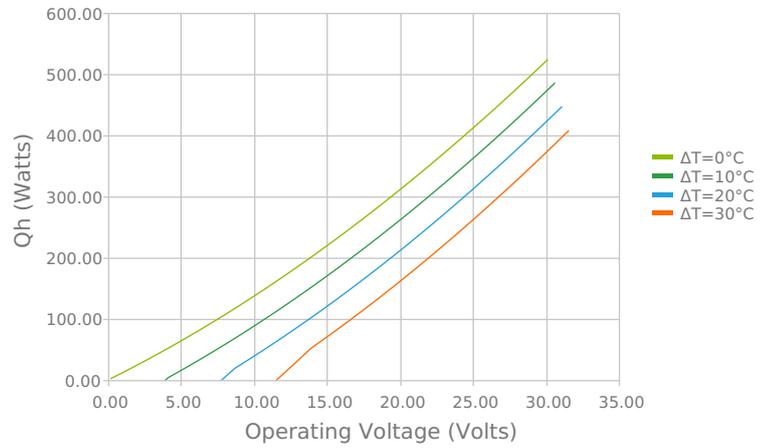

Heat Pumped at Cold Side ( $Q_c$ )  
Voperating = 24 Volts | Ioperating = 7.96 Amps

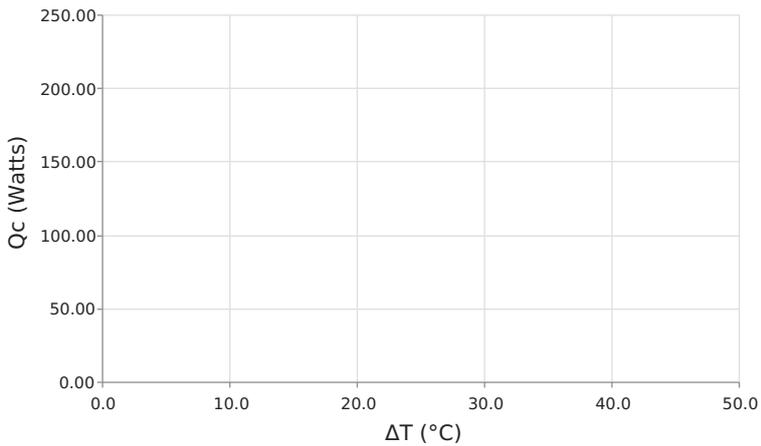


Coefficient of Performance (COP =  $Q_c/P_{in}$ )  
Voperating = 24 Volts | Ioperating = 7.96 Amps

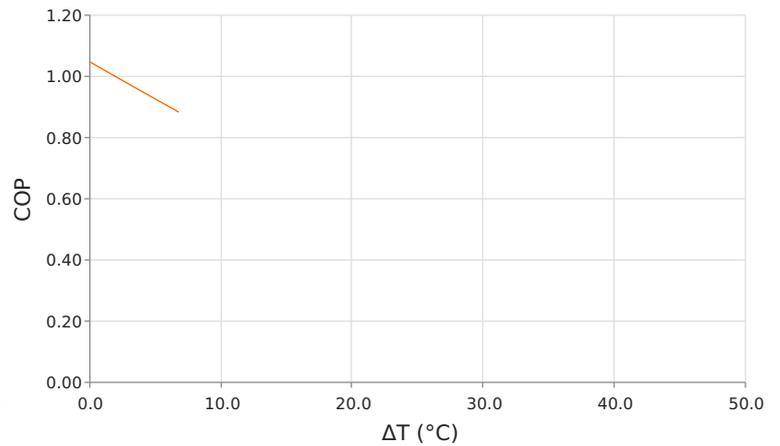


## Specifications

<b>Heat Transfer Mechanism, Cold Side</b>	Air - Forced Convection
<b>Heat Transfer Mechanism, Hot Side</b>	Air - Forced Convection
<b>Operating Temperature Range</b>	-10°C to 48°C
<b>Supply Voltage</b>	24.0 VDC nominal / 30.0 VDC maximum
<b>Current Draw</b>	10.1 A running / 13.0 A startup
<b>Power Supply</b>	271.0 Watts
<b>Performance Tolerance</b>	10%
<b>Hi-Pot Testing</b>	750 VDC
<b>Fan MTBF</b>	40000 hours
<b>Over-Temp Thermostat (Hot and Cold Side Heat Sink)</b>	80°C ± 5°C (hot side heat sink)
<b>Weight</b>	6.00 kg
<b>Panel Mounting</b>	Through

# Mounting Hole Location

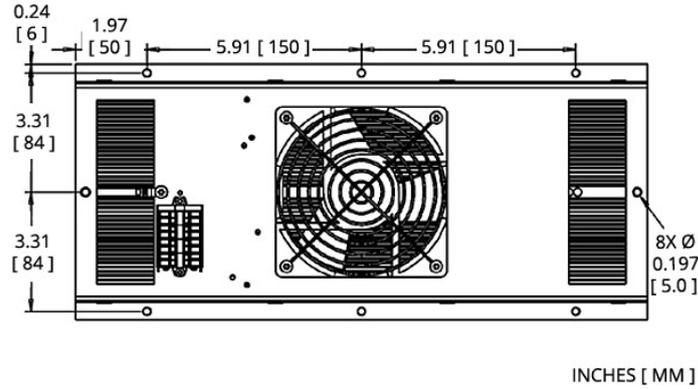

# Wiring Schematic



## ELECTRICAL CONNECTIONS:

- " FAN+ ": + FANs
- " TEM+ ": + TEM
- " TEM - ": - TEM
- " FAN- ": - FANs

Warning: Do not reverse current or use with PWM-regulation.on fan supply.

## Notes

<sup>1</sup>For indoor use only

<sup>2</sup>Units are generally maintenance free, however occasionally it is recommended to clean the heat sinks and fans of debris. This is best done with compressed air.

Any information furnished by Tark Thermal Solutions and its agents, whether in specifications, data sheets, product catalogues or otherwise, is believed to be (but is not warranted as being) accurate and reliable, is provided for information only and does not form part of any contract with Tark Thermal Solutions. All specifications are subject to change without notice. Tark Thermal Solutions assumes no responsibility and disclaims all liability for losses or damages resulting from use of or reliance on this information. All Tark products are sold subject to the Tark Thermal Solutions Terms and Conditions of sale (including Tark's limited warranty) in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2025 Tark Thermal Solutions, Inc. All rights reserved.

Revision: 00 Date: 06-01-2022

Print Date: 05-12-2025