

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
△	17-0015	Design Modify	CMZ	09/21/16

NOTES1:

UL Standard

1.Rated voltage/current : 150V / 4A

2.Withstanding voltage : AC1300V/1Min.

IEC Standard

1.

Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	5A

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 2.50mm, Poles : N=02~12P

3.Operating temperature: -40°C~+130°C

4.Undimensioned tolerances:






Pitch Range In mm	Nominal Dimension Range In mm						-	∩	□
	Over 6	Over 10		Over 30	Over 60	Over 100	Over 150		0.1/10
TO 6	TO 10	TO 24	TO 30	TO 60	TO 100	TO 150			≤
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30		±2'

5.RoHS Compliance

15EDGRC-THR - 2.5 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Black)
2.(Orange)
3.(White)

(RoHS)
00A-(Standard)

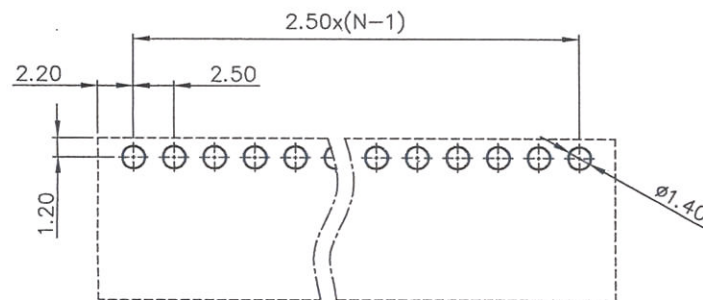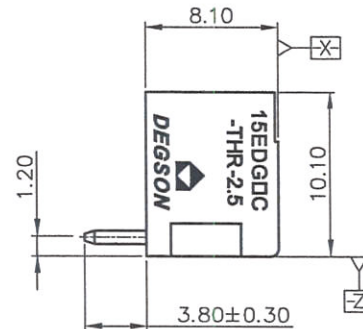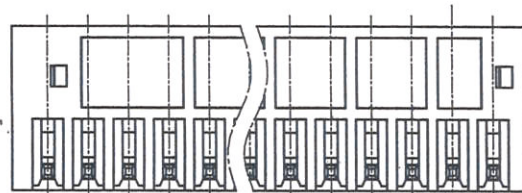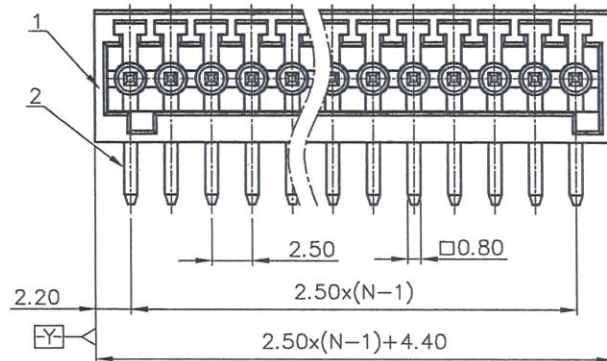

PCB LAYOUT



2	Pin	COPPER	Sn Plated
1	Housing	LCP	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DETACHED LISTS	PART NO.: /	NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD: 2017.3.23	NAME: 15EDGRC-THR-2.5-XXP-1Y-00A(H)	
	CHKD: 2017.3.22	TITLE: CUSTOMER DRAWING	
	DRFT: WL 08/20/15"	REV T1	
THIRD ANGLE PROJECTION		DRAWING NO.: 15EDGRC-THR-2.5-C01	SHEET 1/2
		DO NOT SCALE DRAWING	SCALE 1:1

2017.04.15

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
△	17-0015	Design Modify	CMZ	09/21/16

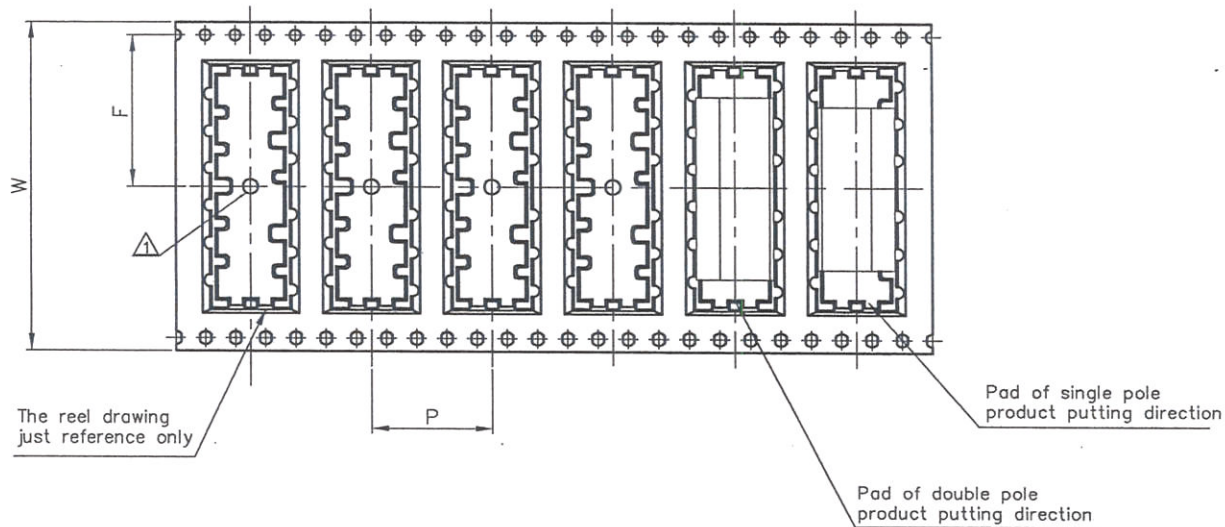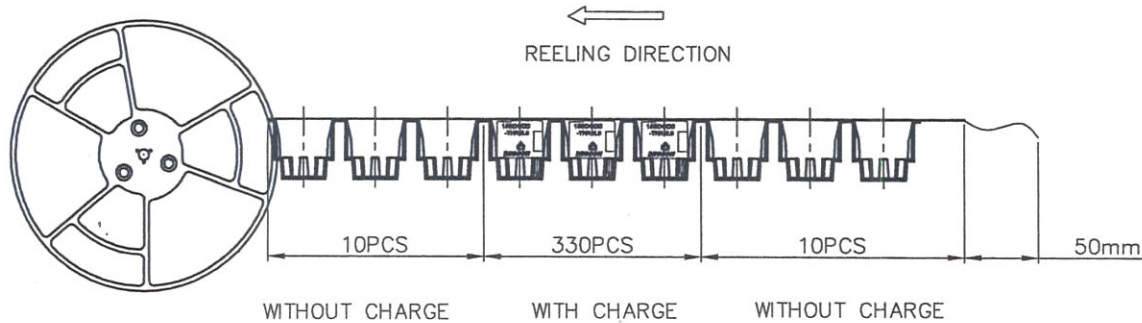

齐发宝
2017.04.15
(仅限内部使用, 对外无效)

Reel Name	POLE	Width /W	Pitch /P	Width/F	Width/B0	Qty. per reel	Reel qty. per carton	Qty. per carton
15EDGRC-THR-2.5-Reel(44)	2~12	44mm	16mm	20.3mm	32.3mm	330	6	1980

DETACHED LISTS	PART NO.:	/	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	Aqron 2017.3.24	NAME: 15EDGRC-THR-2.5-XXP-1Y-00A(H)			
	CHKD:	2017.3.24				
	DRFT:	WL 11/18/15"	TITLE: CUSTOMER DRAWING		REV	T1
		THIRD ANGLE PROJECTION	DRAWING NO.: 15EDGRC-THR-2.5-C01		SHEET	2/2
			DO NOT SCALE DRAWING	SCALE	1:1	