

D1RFRD006

7

6

5

4

3





2

1

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
△		Drawing emend	CSX	04/21/06
△		增加VDE、CE刻字	YeJ	02/27/08
△		图面更新	YeJ	03/28/08
△		增加自动化方针	WLM	09/23/08
△	10-0329	增加标注尺寸	COCO	10/04/10
△	14-0107	黄铜变紫铜, 料号变更: 工频耐压变更为额定冲击电压	WL	06/26/14


VIEW B

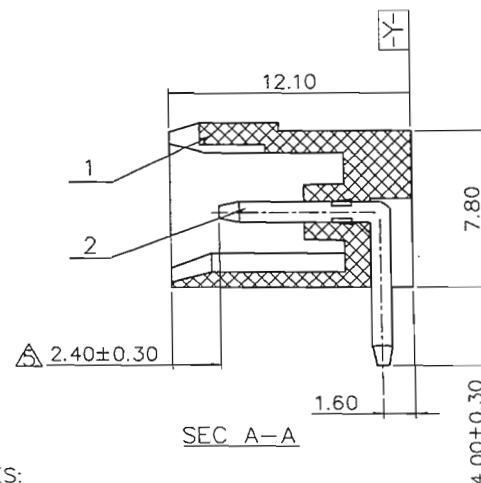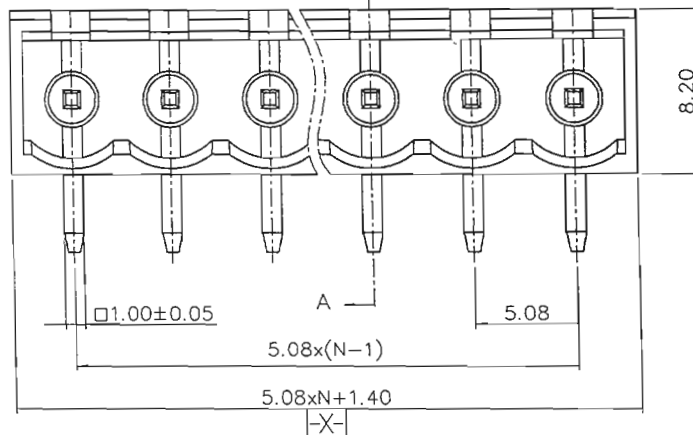

NOTES:


- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
- 2.PITCH: 5.08MM, POLES: 2-24P
- 3.RATED VOLTAGE/CURRENT: UL 300V/15A VDE 320V/20A
- 4.OPERATION TEMPERATURES: -40°C~+105°C
- 5.RATED IMPULSE VOLTAGE: 4.0KV △
- 6.INSULATION RESISTANCE: 5000MΩ/DC1000V
- 7.UNDIMENSIONED TOLERANCES:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	10	10	24	30	60	100	150	□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/0.10

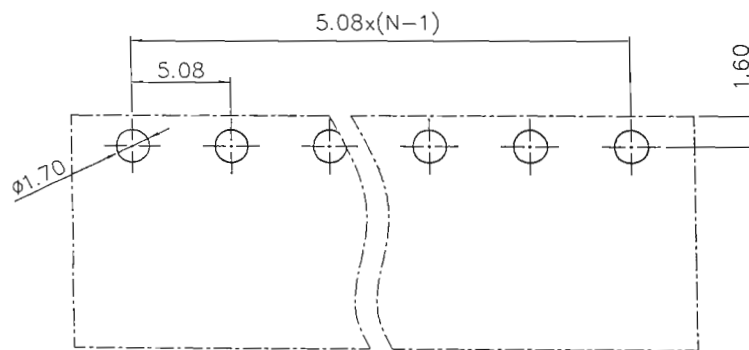

P.C.B LAYOUT

△	2	2EDGR-Pin header Automatic assembly	1008B00340(H)	XX	COPPER	SN PLATED
△	2	2EDGR(A)Pin header Manual assembly	1008B00330(H)	XX	COPPER	SN PLATED
	1	2EDGRC-5.08-Housing	1009A0YXXA(H)	1	PA66	UL94V-0
ITEM		NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)		MATERIAL:		NAME:		DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		REV		T6	
	TOLERANCES EXCEPT AS NOTED		FINISH:		PART NO.:		2EDGRC-5.08-XXP-1Y-00A(H)		DRAWING NO.:		2EDGRC-5.08-E06	
	.X ±		.X' ±		.XX ±		.XX' ±		.XXX ±		.XXX' ±	
	ANGLES ± 1°		APPD: <i>Axon 12/18/14</i>		TITLE: ASSEMBLY DRAWING		DO NOT SCALE DRAWING		SCALE		N/A	
			CHKD: <i>Lim 12/18/14</i>		DRAWING NO.:		SHEET		1/1			
	THIRD ANGLE PROJECTION		DRFT: HW 08/23/05"									