

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 15A
- 2.Withstanding voltage : AC1600V/1Min.

IEC Standard


1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	320V
Rate current(A)	20A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.08mm, Poles : N=02~24P
- 3.Operating temperature: -40°C~+105°C
- 4.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
Over	To	Over	To	Over	To	Over	To	
6	10	10	24	30	60	60	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

5.RoHS Compliance

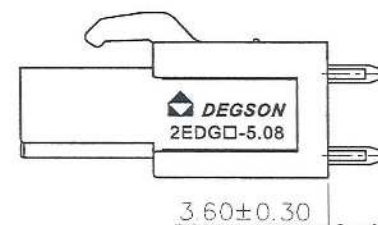

2EDGB - 5.08 - XXP - 1Y - 00A (H)
 (Series No.)(Pitch)(Poles)(Single Pitch) (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

PCB LAYOUT

ITEM	NAME OF PART	MATERIAL	NOTES
3	Cover	PA66	UL94V-0
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

DETACHED LISTS

PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
APPD: <i>Agon 2018.8.15</i>	NAME: 2EDGB-5.08-XXP-1Y-00A(H)		
CHKD: <i>dayz 2018.8.15</i>	TITLE: CUSTOMER DRAWING		
DRFT: CZ 2018.08.11	REV: T0		
THIRD ANGLE PROJECTION	DRAWING NO.: 2EDGB-5.08-C01	SHEET	1/1
	DO NOT SCALE DRAWING	SCALE	1:1

