


RoHS COMPLIANT

REV	DATE	DESCRIPTION	
J	02/24/'21	Update 24PIN DIM B (36.3→36.4±0.3)	Apply: Alan
K	03/14/'23	增加不銹鋼螺絲編碼	Apply: Alan

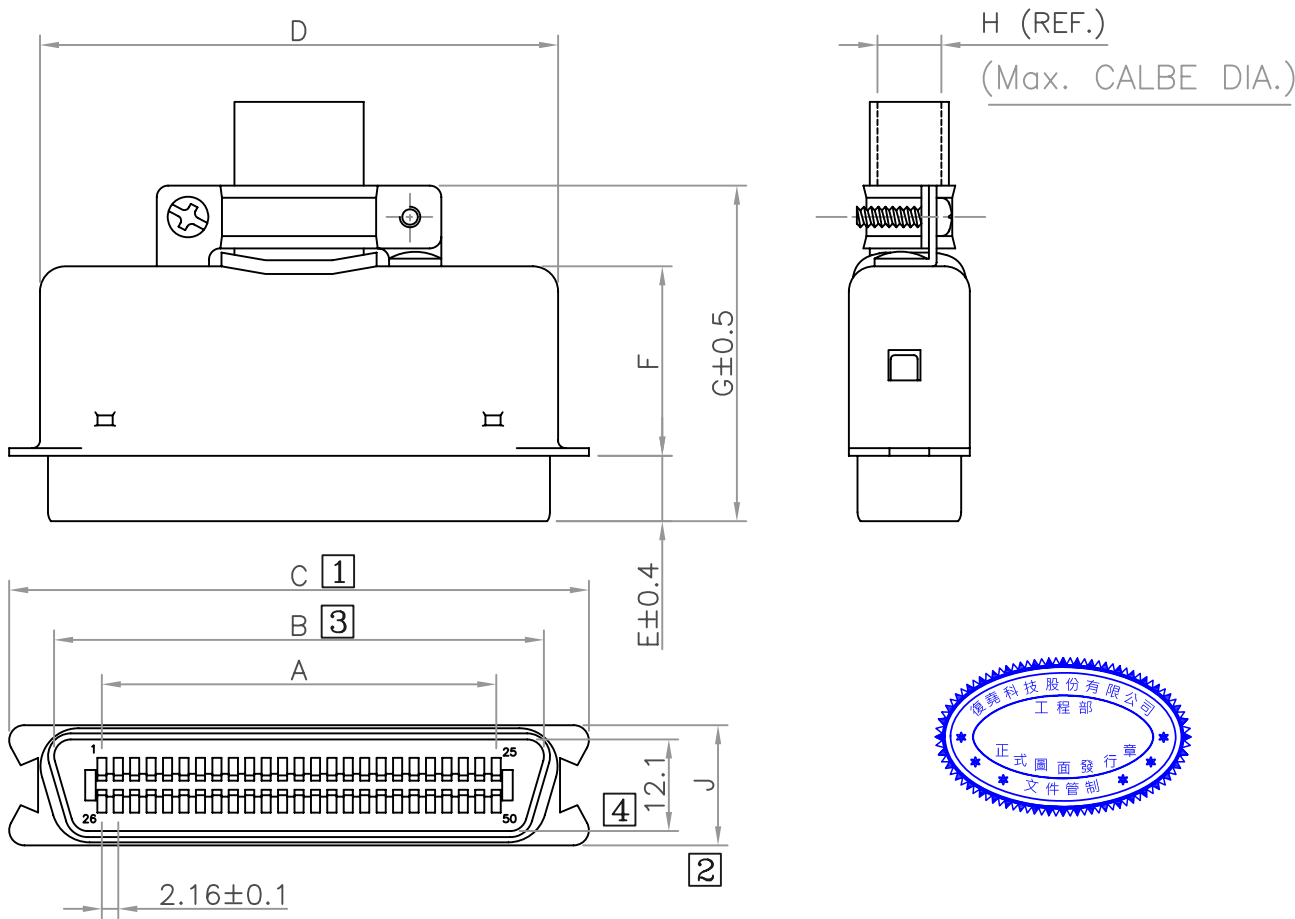

Material & Finish

SHELL:

- Steel
- Nickel plated steel

PIN CONTACT:

- Brass
- Gold plated

INSULATOR:

- PBT & Glass-fibre reinforced
- UL 94V-0, Blue

NUMBER OF CONTACT:

14,24,36,50

CURRENT RATING:

5 Amp

DIELECTRIC STRENGTH:

1000V for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500V DC)

TEMPERATURE:

-55°C to +105°C

Positions	A	B	C	D	E	F	G	H	J
14	12.96	25.6	37.85	29.0	8.1	21.2	39.3	7.0	15.5
24	23.76	36.4	48.8	39.9	7.6	20.6	38.3	9.0	15.8
36	36.72	49.3	61.8	53.2	7.9	22.6	40.6	11.5	15.8
50	51.84	64.4	77.0	68.2	8.5	24.9	43.8	12.5	15.8

SCREW TYPE:
 G: 客戶專用(GC004)
 D: 4*9螺絲Steel
 S: 4*9螺絲SUS

CONTACT PLATING:
 B: Gold Flash
 F: Gold 30u"

PACKING:
 0: 散裝
 1: 單PCS包

FU-YAO TECHNOLOGY CO., LTD.
 復堯科技股份有限公司

MODEL NAME:
 CENTRONIC SOLDER TYPE MALE
 ASSEMBLY METAL STRAIGHT COVER

MARK EXPLAIN:
 Revision Change
 Important Dimension
 Note

TOLERANCE:
 0.000: ±0.10
 0.00 : ±0.20
 0.0 : ±0.30
 0. : ±0.40
 ANGLE: ±3.0°

UNIT: mm

PART NO. RC3-xxPBBAAS0000
 APPROVED BY: ALBERTA
 CHECKED BY: ALAN
 DRAW BY: JARVIS

FILE NO. FIG00083
 SCALE: 1/1
 DATE: 971231